

INTELLitiles™




sharp

Signature
floorcoverings®
Quality. Style. Inspiration.




green building council australia
MEMBER


INTELLITILES™ | **sharp**




Precise 579




Quick 570



Alert 578



Bright 558



Accurate 559

Intelli Features

The Intelli tiles collection have been designed with intelligent features that provide significant cost savings during the life cycle of the product.

Design

- Mix and match for endless design possibilities
- Soft underfoot in comparison to timber & ceramics
- Natural sound absorbing properties ~24db
- Cost savings over life cycle of product vs broadloom

Pre-Installation & Planning

- Electrical disconnect & connection (approx \$55 per workstation)
- Workstation & furniture moving (approx \$80 per workstation)
- Stock handling and transportation

Installation

- Less wastage, carpet tiles 2-3% vs broadloom 7-8%
- Installation costs are ~25% less than broadloom (approx \$3sqm saving)
- Easy to handle 5sqm boxes for high rise installations
- OHS - 5sqm boxes lighter and smaller than rolls
- Boxes are packed on pallets for easier overall handling

Post Installation & Maintenance

- Ultragard Soil and Stain protection means stains won't want to stick
- Provides easy access to underfloor cabling
- Selective tile maintenance for effective rejuvenation
- DIY Maintenance
- Longer life cycle 15 - 20% vs broadloom
- End of life cycle savings on replacement of carpet
- Environmental advantages of using modular carpet

Ultragard Soil & Staining Protection



Solution Dyed Nylon (SDN) fibres have a proven track record of superior performance in commercial installations.


They deliver outstanding resistance to soiling, staining, crushing and wear. The dying method also ensures superior colour fastness.

In addition to the inherit benefits of the Solution Dyed Nylon fibre, this collection includes the benefits of Ultragard.



Ultragard is an invisible shield against soiling and staining, which is applied during the manufacturing process of the carpet.

The advantages of using Ultragard treated carpet are as follows:

- Easier Maintenance, Dirt does not want to stick to Ultragard
- Spills are repelled for longer, providing opportunity for spot cleaning
- Anti Soiling properties facilitates removal of every day stains and dirt
- Carpet stays cleaner 2-3 times longer than non treated carpet
- Carpet sustains a newer look for longer

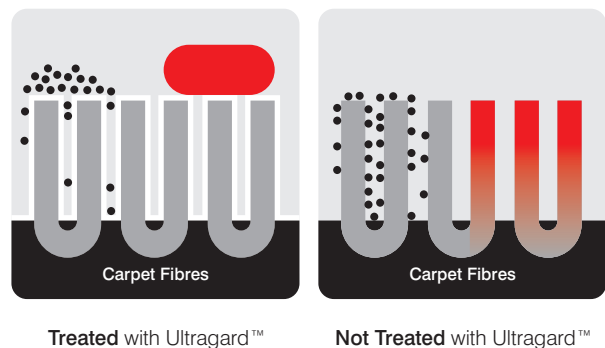

Product	Intelli Tiles, Sharp
Construction	Loop Pile & Tip Sheared
Yarn/Fibre	100% Solution Dyed Nylon
Dye Method	Solution Dyed
Pile Weight	600g/m ²
Pile Height	4.0mm to 3.0mm
Gauge	1/12
Tile Size	500mm x 500mm
Backing	Thermoplastic with reinforced fibre glass
Total Thickness	7.0mm
Total weight	4.9kg/m ²
Dimensional Stability	<0.15%
Electrostatic Propensity	<3.0kv
Fire Rating ISO 9239.1	4.4 kw/m ² Critical Radiant Flux
Adhesive	ECO-800 Pressure Sensitive Low VOC
Installation Method	Quarter Turn



*PC: Patient Care Areas. *NSB: Non Sprinkled Buildings



Signature Floorcoverings Pty Ltd ABN 45 007 172 938
 13 Wurundjeri Drive Epping 3076 Victoria Australia
 Phone 1800 150 554 Fax +613 9401 0866 www.signaturefloors.com.au

Terms and Conditions: Specifications are subject to manufacturing tolerances and may be changed without prior notice. Dye lots may vary in colour from sample and between production lots. All product purchases are subject to Signature Floorcoverings Standard Terms and Conditions of Sale. Please refer to our Installation Guideline, Maintenance Manual and Warranty Document for further clarification.

Disclaimer: This brochure is presented for informational purposes only. Every effort is made to ensure that carpet images are of an accurate representation of the product. However, they are for illustrative purposes only and colour variations may occur in actual product, and between die series. Please note that lineal patterns when installed directional, may produce an undesired effect when lines of the same colour meet on two edges. Installers need to monitor this during installation and reposition tiles where appropriate. Patterns that are random in nature may contain additional colour ways to the ones displayed on the samples. Please consult your commercial sales consultant for further information.