



FUSION **PLANKS**  
by signature®

Imagine a single design piece not only bold on its own,  
but with the ability to melt into its counterparts and  
change the statement, the look, the narrative depending  
on what you need.

The new Fusion planks collection is formed as one.

# CORE CONNECT COMPOUND

# CORE

The base, the foundation of it all.



**CORE zinc** 6-000-000PL  
**CORE lead** 2-000-000PL  
**CORE carbon** 1-000-000PL

double herringbone

# CONNECT

The amalgamation of the foundation and the highlight coming together.

CONNECT carbon red 1-023-035PL

ashlar



# COMPOUND

The final unification, the explosion of vibrancy  
to create the reaction desired.



COMPOUND lead aqua 2-021-031PL  
COMPOUND carbon sand 1-007-099PL





CORE  
CONNECT  
COMPOUND

The synergy between CORE,  
CONNECT and COMPOUND  
make for a beautiful alliance,  
a symphonic flow.

COMPOUND lead green 2-048-002PL  
CONNECT lead green 2-048-002PL  
CORE lead 2-000-000PL

herringbone






NIGHT  
IS JUST  
A FUSION  
OF DREAMS

– Mirela Stancu, Contopire

**CORE zinc** 6-000-000PL  
**CONNECT zinc teal** 6-046-021PL  
**COMPOUND zinc teal** 6-046-021PL  
**CORE lead** 2-000-000PL  
**CONNECT lead magenta** 2-060-062PL  
**COMPOUND lead magenta** 2-060-062PL  
**CORE carbon** 1-000-000PL  
**CONNECT carbon navy** 1-019-040PL  
**COMPOUND carbon navy** 1-019-040PL

double herringbone

}}



True to definition, Fusion planks can complement Signature's other flooring options, such as our vinyl plank collections.

**CONNECT zinc azure** 6-040-036PL  
**COMPOUND zinc azure** 6-040-036PL

basket weave



SUSTAINABILITY

Fusion planks are GreenTag® GreenRate Level A certified for Green Star projects.


Fusion planks can also contribute to points in the WELL Building Standard.

EPDs and Declare labels available upon request.



SHAPES® BY SIGNATURE

Fusion planks can be ordered in 10 Shapes® by Signature. 50m<sup>2</sup> minimum applies.

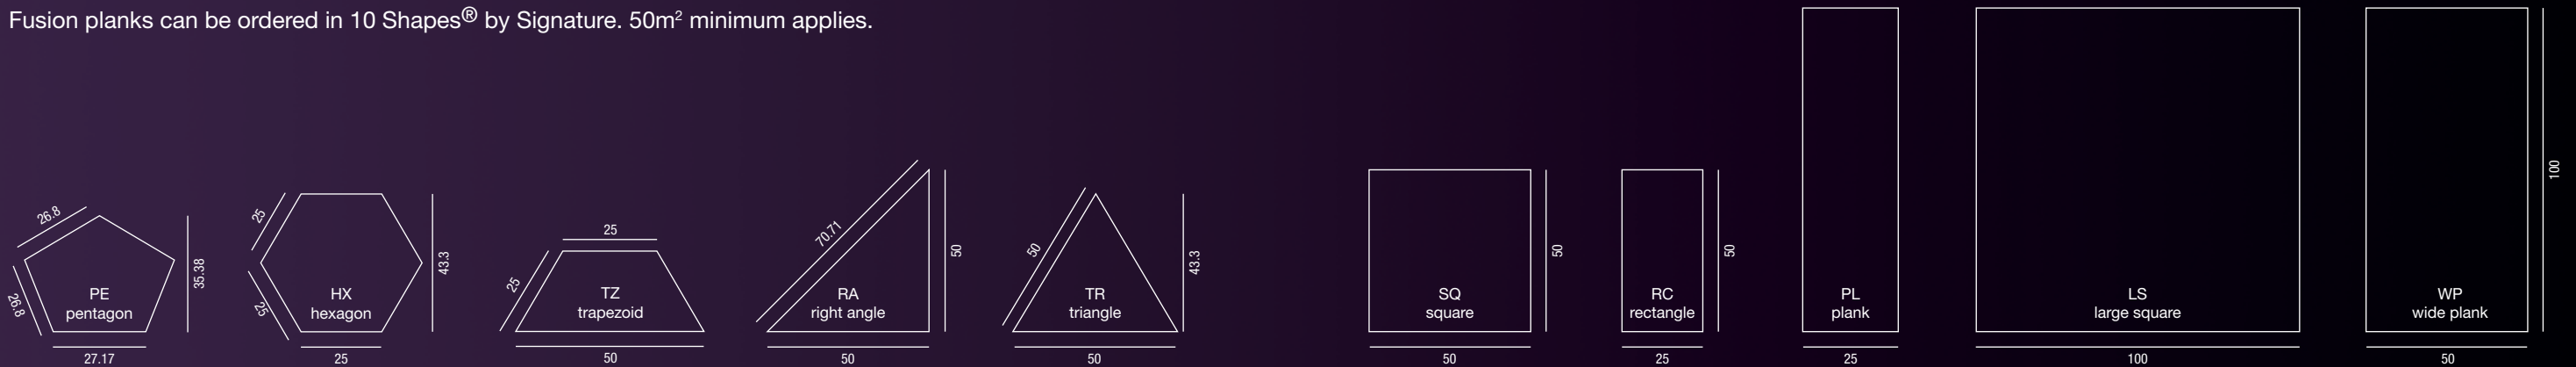

Specifications are subject to manufacturing tolerances and may be changed without prior notice. Dye lots may vary in colour from sample and between production lots. All product purchases are subject to signature floorcoverings standard terms and conditions of sale. Please refer to our installation guideline, maintenance manual and warranty document for further clarification. As per competition & consumer act (CCA): "Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure." 01/2020©

WITH THANKS TO OUR  
FURNITURE SUPPLIERS

stylecraft

AJAR



## CORE

## CONNECT

Width of colour stripe varies across planks.



<b>CORE</b> ZINC 6-000-000PL	<b>CORE</b> LEAD 2-000-000PL	<b>CORE</b> CARBON 1-000-000PL
------------------------------------	------------------------------------	--------------------------------------



<b>CONNECT</b> ZINC YELLOW 6-082-003PL	<b>CONNECT</b> ZINC TEAL 6-046-021PL	<b>CONNECT</b> ZINC AZURE 6-040-036PL	<b>CONNECT</b> LEAD AQUA 2-021-031PL	<b>CONNECT</b> LEAD GREEN 2-048-002PL	<b>CONNECT</b> LEAD MAGENTA 2-060-062PL	<b>CONNECT</b> CARBON RED 1-023-035PL	<b>CONNECT</b> CARBON NAVY 1-019-040PL	<b>CONNECT</b> CARBON SAND 1-007-099PL
--	--	---	--	---	---	---	--	--




CORE lead 2-000-000PL

ashlar

# Signature

## COMPOUND

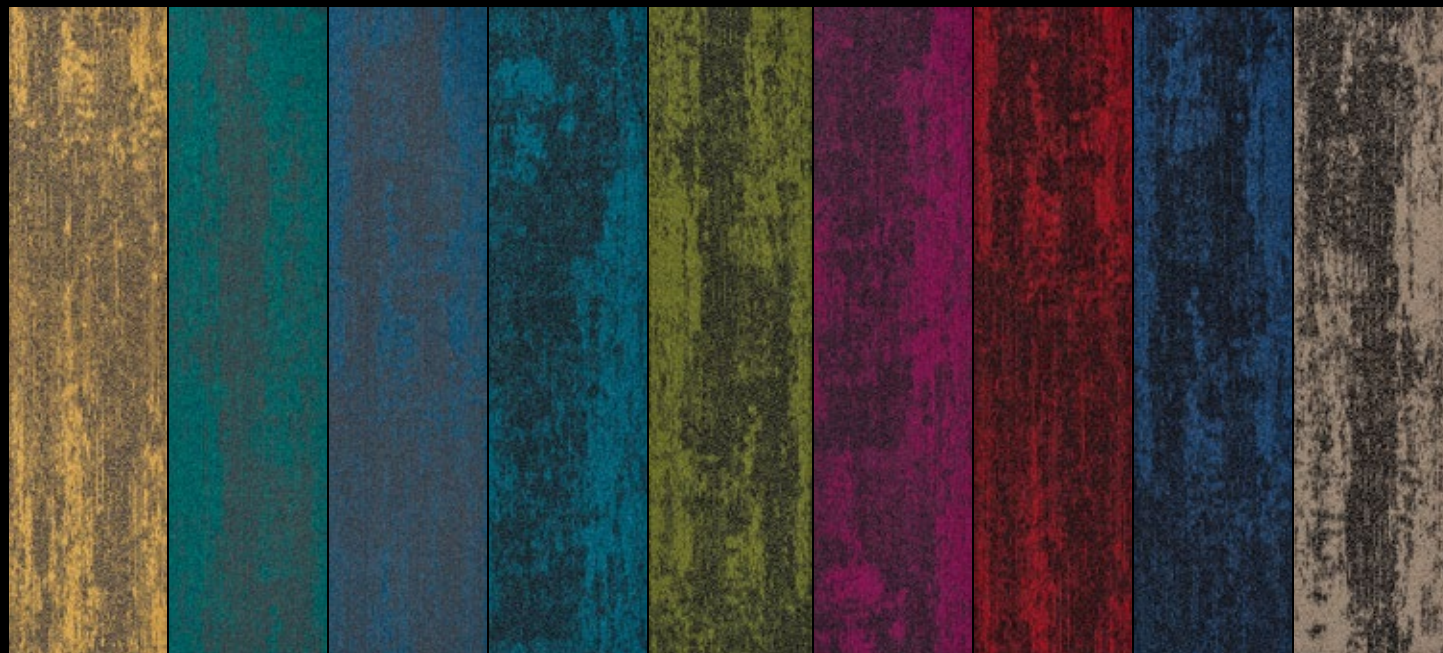

<b>COMPOUND</b> ZINC YELLOW 6-082-003PL	<b>COMPOUND</b> ZINC TEAL 6-046-021PL	<b>COMPOUND</b> ZINC AZURE 6-040-036PL	<b>COMPOUND</b> LEAD AQUA 2-021-031PL	<b>COMPOUND</b> LEAD GREEN 2-048-002PL	<b>COMPOUND</b> LEAD MAGENTA 2-060-062PL	<b>COMPOUND</b> CARBON RED 1-023-035PL	<b>COMPOUND</b> CARBON NAVY 1-019-040PL	<b>COMPOUND</b> CARBON SAND 1-007-099PL
---	---	--	---	--	--	--	---	---

### construction

**yarn/fibre**  
solution dyed nylon  
**pile weight**  
580g/m<sup>2</sup>  
**pile height**  
4mm  
**gauge**  
1/12  
**tile size**  
250mm x 1000mm  
**total thickness**  
6.5mm  
**carton size**  
5m<sup>2</sup>  
**total weight**  
4.58 kg/m<sup>2</sup>  
**dimensional stability**  
<0.15%  
**backing**  
Thermo Bak™  
**electrostatic propensity**  
<2.0kv  
**fire rating ISO 9239 1**  
>4.5 kw/m<sup>2</sup> critical radiant flux  
**recommended adhesive**  
RLA Polymers GS300  
**installation method**  
ashlar, herringbone,  
basket weave

### availability

**Comfi Bak® option**  
50m<sup>2</sup> minimum  
**customise Shapes™**  
50m<sup>2</sup> minimum  
**traffic**  
extra heavy duty commercial  
**warranty**  
15 year limited  
**fire**  
suitable all areas  
**stain/soil**  
Ultra Gard (thermo chemical  
treatment)  
**sustainability**  
GreenTag® Green Rate Level A  
EPDs and Declare labels  
WELL eligible

### core

multi-level loop  
solution dyed nylon  
612g/m<sup>2</sup>  
4mm  
1/12  
250mm x 1000mm  
6.5mm  
5m<sup>2</sup>  
4.61 kg/m<sup>2</sup>  
<0.15%  
Thermo Bak™  
<2.0kv  
>4.5 kw/m<sup>2</sup> critical radiant flux  
RLA Polymers GS300  
ashlar, herringbone,  
basket weave  
in stock  
50m<sup>2</sup> minimum  
50m<sup>2</sup> minimum  
extra heavy duty commercial  
15 year limited  
suitable all areas  
Ultra Gard (thermo chemical  
treatment)  
GreenTag® Green Rate Level A  
EPDs and Declare labels  
WELL eligible

### connect

multi-level loop  
solution dyed nylon  
612g/m<sup>2</sup>  
4mm  
1/12  
250mm x 1000mm  
6.5mm  
5m<sup>2</sup>  
4.61 kg/m<sup>2</sup>  
<0.15%  
Thermo Bak™  
<2.0kv  
>4.5 kw/m<sup>2</sup> critical radiant flux  
RLA Polymers GS300  
ashlar, herringbone,  
basket weave  
in stock  
50m<sup>2</sup> minimum  
50m<sup>2</sup> minimum  
extra heavy duty commercial  
15 year limited  
suitable all areas  
Ultra Gard (thermo chemical  
treatment)  
GreenTag® Green Rate Level A  
EPDs and Declare labels  
WELL eligible

### compound

multi-level loop  
solution dyed nylon  
646g/m<sup>2</sup>  
4mm  
1/12  
250mm x 1000mm  
6.5mm  
5m<sup>2</sup>  
4.65kg/m<sup>2</sup>  
<0.15%  
Thermo Bak™  
<2.0kv  
>4.5 kw/m<sup>2</sup> critical radiant flux  
RLA Polymers GS300  
ashlar, herringbone,  
basket weave  
in stock  
50m<sup>2</sup> minimum  
50m<sup>2</sup> minimum  
extra heavy duty commercial  
15 year limited  
suitable all areas  
Ultra Gard (thermo chemical  
treatment)  
GreenTag® Green Rate Level A  
EPDs and Declare labels  
WELL eligible



Our manufacturing process ensures no two planks are the same.  
Please note that there may be batch variations from different dye lots.  
**Comfi Bak® - optional backing for enhanced comfort. 50m<sup>2</sup> minimum order applies.**  
**Available in Shapes by Signature®, 50m<sup>2</sup> minimum order applies.**



innovation & inspiration

Signature<sup>®</sup>  
floorconcepts

au 03 9401 0888  
nz 0800 150 555  
[signaturefloors.com.au](http://signaturefloors.com.au)  
[signaturefloors.co.nz](http://signaturefloors.co.nz)

Limitations of the printing process  
may not represent the actual colour  
of the product. Please refer to  
samples for final colour selection.

**Terms & conditions:** Specifications are subject to manufacturing tolerances and may be changed without prior notice. Product may vary in colour from sample and between production lots. All product purchases are subject to Signature Floorcoverings Standard Terms & Conditions of Sale. Please refer to our Technical Information Manual, Maintenance Guide & Warranty Guide for further clarification. © Signature Floors 01/2020

**See detailed installation guidelines & warranty info online.**