

GROOVE




carpet planks featuring
cut & loop construction

innovation & inspiration


| Signature[®]
floorconcepts

for a textured cut & loop construction

GROOVE

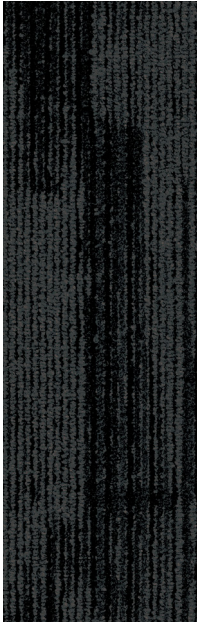

notch 180

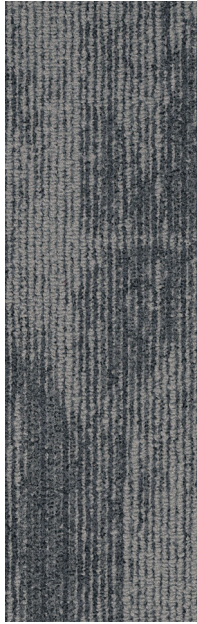

score 240



trench 390



canal 420



furrow 570

product construction
yarn/fibre
pile weight
pile height
gauge
tile size
total thickness
total weight
carton size
dimensional stability

friendly planks, groove
 high loop low cut
 100% SDN
 850g/m²
 4.0mm
 1/10
 250mm x 1000mm
 7.5mm
 5.2kg/m²
 5sqm
 <0.15%

backing
electrostatic propensity
fire rating ISO 9239.1
recommended adhesive
installation method

Comfi Bak®
shapes

co-ordinates
availability

Thermo Bak™
 <2.0kv
 5.1kw/m² critical radiant flux
 RLA Polymers GS300
 herringbone, ashlar

50m² min
 50m² min

all intelli & friendly carpet tiles
 in stock



Declare.

Signature®
 floorconcepts

au 03 9401 0888
 nz 0800 150 555
signaturefloors.com.au
signaturefloors.co.nz