



BY SIGNATURE®



OSLO

DESIGN CREATED FOR PEOPLE

BY SIGNATURE®



NORSE

NATURE'S DELICATE COLOUR PALETTE

NORSE 600





SKANDI 100 NORSE 100 ULTIMATE CASABLANCA OAK 24983



OSLO

MUTED TONES

& EXPRESSIVE TEXTURES



SKANDI

NATIVE PATTERNS FOR A MODERN WORLD

SKANDI 300



Signature

MALMO

A REFLECTION OF OUR OUTSIDE WORLD


MALMO 700 ULTIMATE SUMMER OAK 24219



OSLO

THE HARMONY OF CO-ORDINATING TEXTURES

SKANDI 400 MALMO 400 NORSE 400

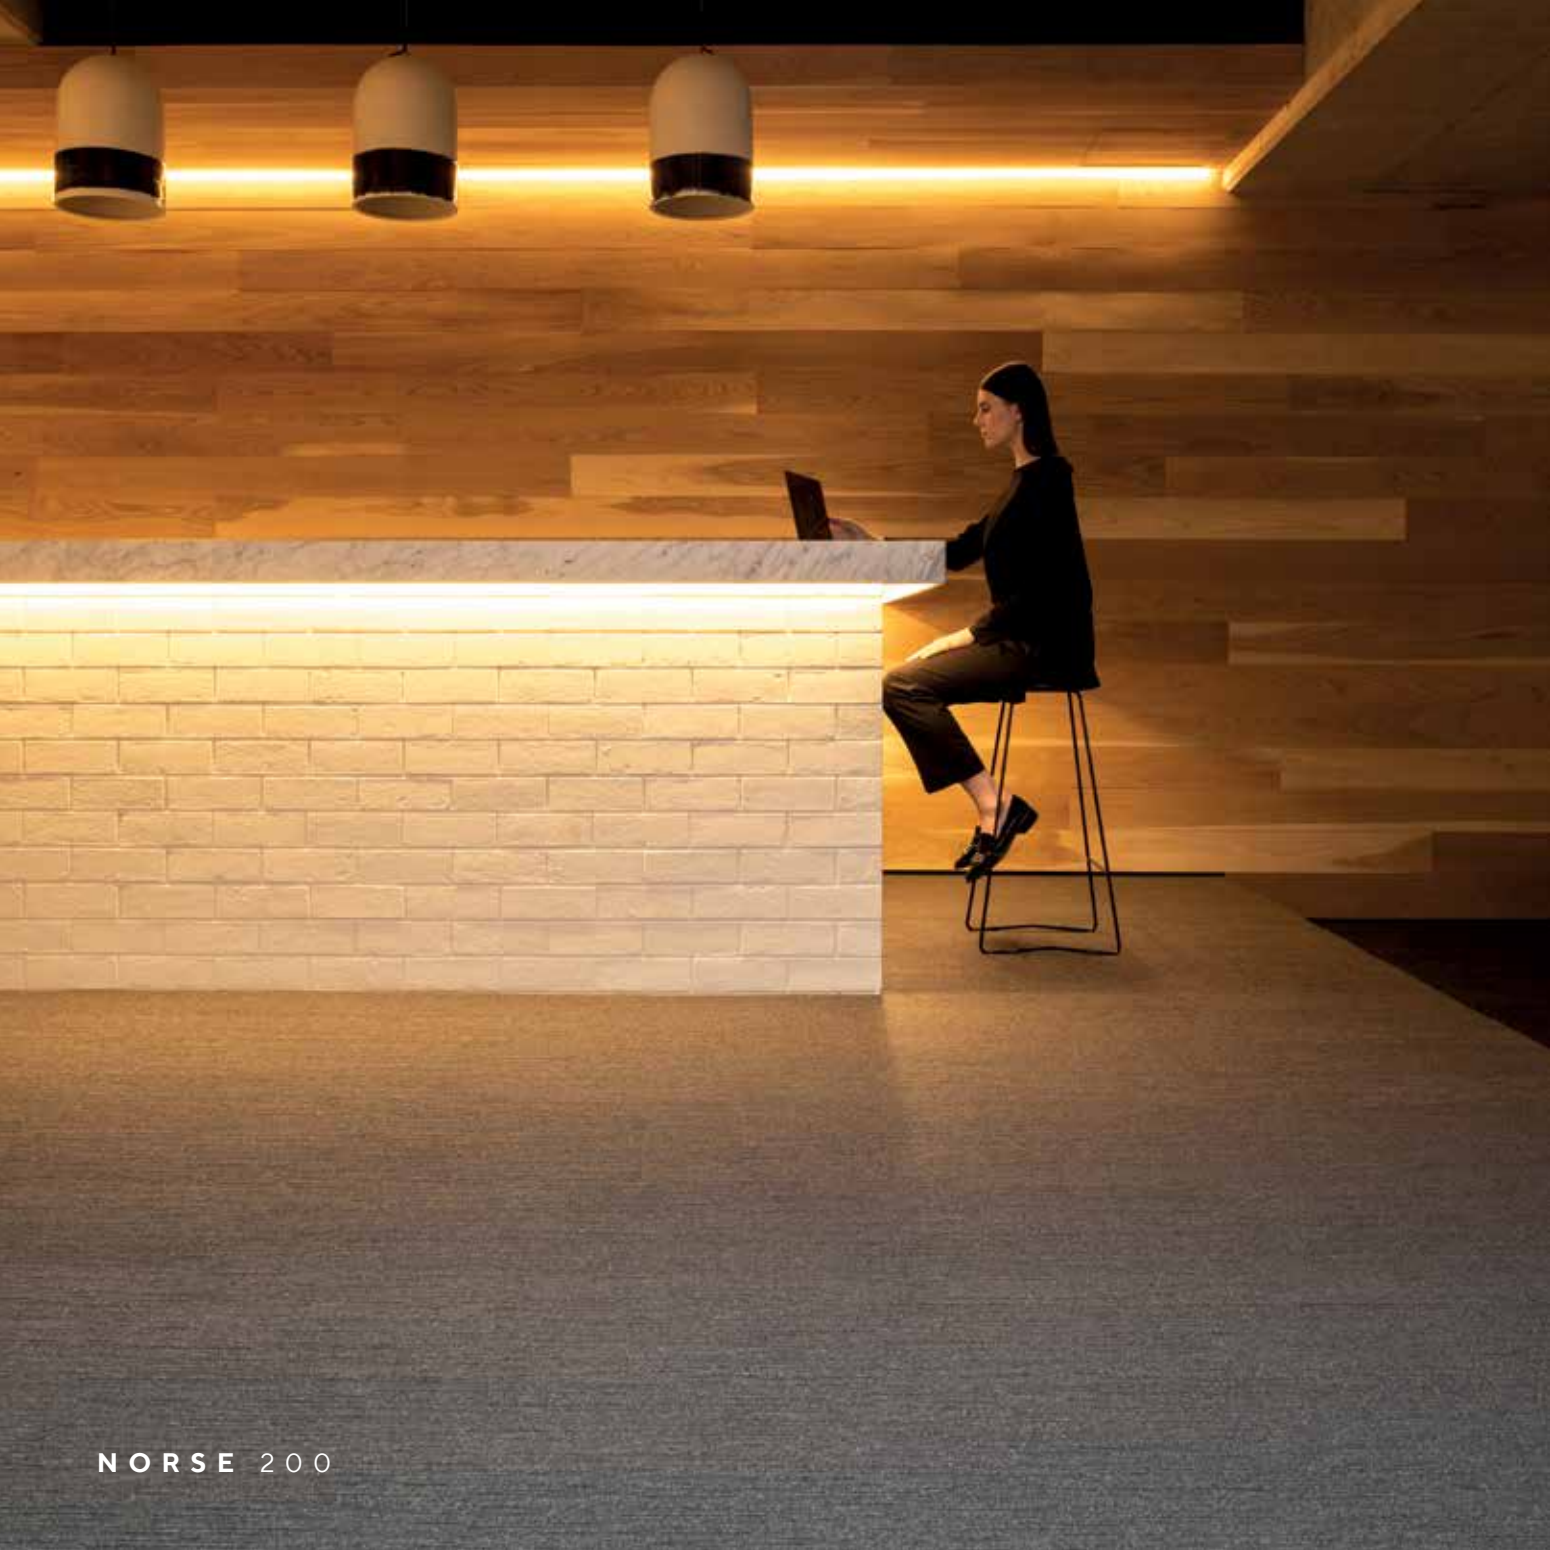

NORSE 200

NORSE

A NORDIC LANDSCAPE AT DAWN





MALMO 900 NORSE 900

Signature



SEEKING ADDED COMFORT?

OSLO CAN BE ORDERED
IN COMFI BAK® BY SIGNATURE

ACOUSTIC PERFORMANCE -
THERMAL BENEFIT -
COMFORT UNDERFOOT -

* 100M² MINIMUM ORDER APPLIES



SKANDI



SKANDI TROSA 100 **SKANDI TOVA** 200 **SKANDI TORI** 300 **SKANDI ODENSE** 400 **SKANDI IDDA** 500 **SKANDI TALE** 600 **SKANDI NATTI** 700 **SKANDI WINIE** 800 **SKANDI FLEN** 900

NORSE



NORSE DYLAN 100 **NORSE JAX** 200 **NORSE OSKAR** 300 **NORSE ESKEL** 400 **NORSE STEN** 500 **NORSE LARZ** 600 **NORSE LUND** 700 **NORSE SOREN** 800 **NORSE RAE** 900

THINKING OUTSIDE THE PLANK?

OSLO CAN BE ORDERED
IN SHAPES™ BY SIGNATURE MODULAR SHAPES:

- RIGHTANGLE
- PENTAGON
- RECTANGLE
- HEXAGON
- TRAPEZOID
- TRIANGLE
- SQUARE

& VIVID 101 COLOURS TOO

* 100M² MINIMUM ORDER APPLIES



MALMO



MALMO ZAIDE 100 **MALMO JETTE** 200 **MALMO NIRI** 300 **MALMO MAJA** 400 **MALMO KARLA** 500 **MALMO RAKEL** 600 **MALMO ANNELI** 700 **MALMO GALA** 800 **MALMO DANA** 900

product construction	malmo	norse	skandi
yarn/fibre	high loop, low cut solution dyed nylon	high loop, low cut solution dyed nylon	high loop, low cut solution dyed nylon
pile weight	850g/m ²	850g/m ²	850g/m ²
pile height	4mm	4mm	4mm
gauge	1/10"	1/10"	1/10"
plank size	250mm x 1000mm	250mm x 1000mm	250mm x 1000mm
total thickness	7.5mm	7.5mm	7.5mm
carton size	5m ²	5m ²	5m ²
total weight	5.2kg/m ²	5.2kg/m ²	5.2kg/m ²
dimensional stability	<0.15%	<0.15%	<0.15%
backing	Thermo Bak™	Thermo Bak™	Thermo Bak™
electrostatic propensity	<3.0kv	<3.0kv	<3.0kv
fire rating ISO 9239.1	>4.5kw/m ² critical radiant flux	>4.5kw/m ² critical radiant flux	>4.5kw/m ² critical radiant flux
recommended adhesive	RLA Polymers GS300	RLA Polymers GS300	RLA Polymers GS300
installation method	ashlar, herringbone	ashlar, herringbone	ashlar, herringbone
co-ordinates with	all Signature planks	all Signature planks	all Signature planks
Comfi Bak® option*	100m ² min	100m ² min	100m ² min
customise Shapes*	100m ² min	100m ² min	100m ² min
traffic	extra heavy duty commercial	extra heavy duty commercial	extra heavy duty commercial
warranty	15 year limited	15 year limited	15 year limited
fire	suitable all areas	suitable all areas	suitable all areas
GreenStar	GreenTag® Certified	GreenTag® Certified	GreenTag® Certified
availability	in stock	in stock	in stock



Our manufacturing process ensures no two planks are the same. Please note that there may be batch variations from different dye lots.
***Comfi Bak® - optional backing for enhanced comfort. 100m² minimum order applies.**
***Available in Shapes by Signature®. 100m² minimum order applies.**

