

intellitiles
form 




intelligent technology
combined with smart benefits


innovation & inspiration

| 
Signature[®]
carpettileconcepts


for total flexibility & cost efficiency




frame 679



outline 676



profile 670

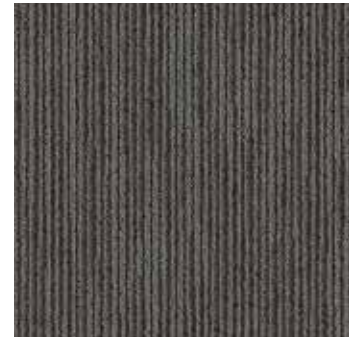

model 671



cast 650

product construction intelli tiles, form
yarn/fibre textured loop pile
pile weight solution dyed nylon
630g/m²
pile height 3.5mm to 5.0mm
gauge 1/10
tile size 500mm x 500mm
total thickness 7.0mm
carton size 5sqm

dimensional stability <0.15%
backing Thermo Bak™
electrostatic propensity <2.0kv
fire rating ISO 9239 1 >4.5 kw/m² critical radiant flux
recommended adhesive RLA Polymers GS300
installation method quarter turn, brick, ashlar
co-ordinates with all intelli carpet tiles
availability in stock

Traffic

Extra Heavy Duty Commercial 

Warranty

15 Year Limited 

Fire

Suitable All Areas 

Green

89% GreenStar Points 

Stain/Soil

Ultragard 

Signature®
floorconcepts

tel 613 9401 0888
fax 613 9401 0866
signaturefloors.com.au