

pixel
static 



innovation streamlined with
versatility in mind


innovation & inspiration

| *Signature*[®]
floorconcepts

innovation streamlined with versatility in mind




innovation streamlined with versatility in mind

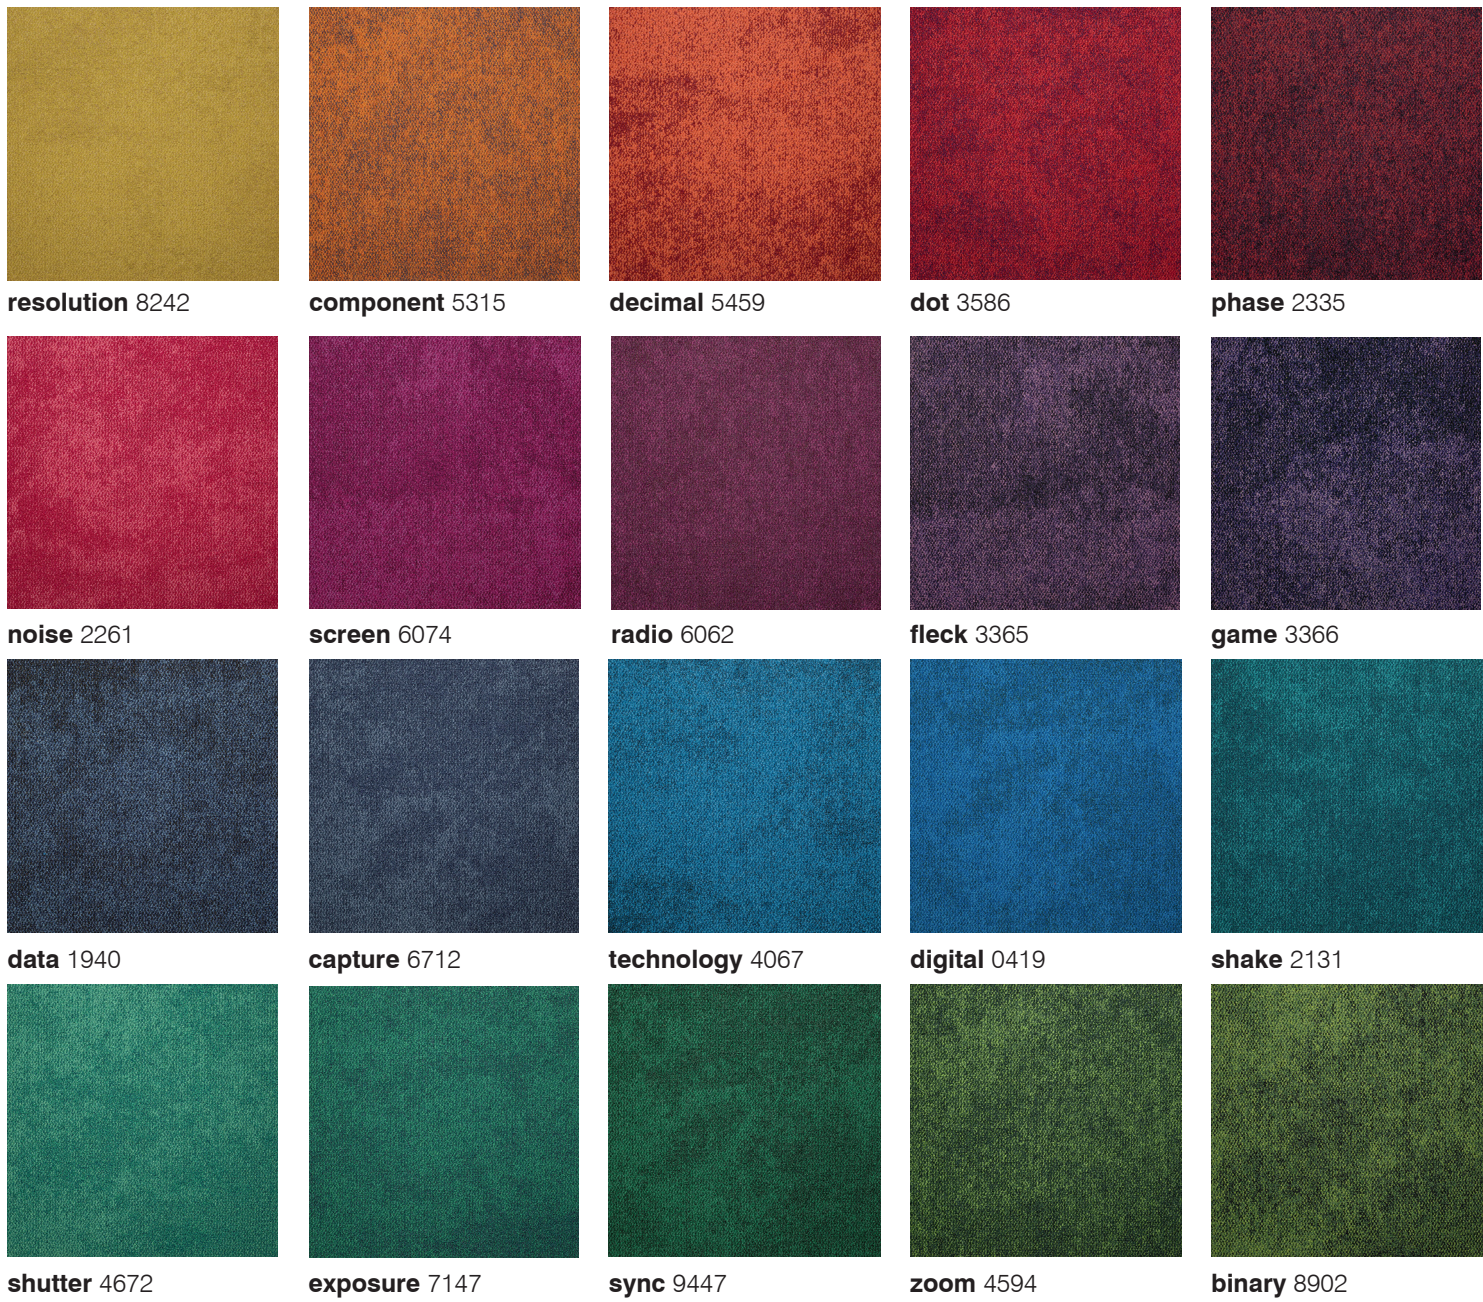

product construction
 pixel, static
 multi-level loop
 solution dyed nylon
yarn/fibre
 646g/m²
pile weight
 4mm
pile height
 1/10
gauge
 500mm x 500mm
tile size
 7.0mm (Thermo Bak™)
 9.5mm (Comfi Bak®)
total thickness
 5m²
carton size
 5.0kg/m² (Thermo Bak™)
 4.2kg/m² (Comfi Bak®)
total weight
 <0.15%
dimensional stability
 Thermo Bak™, Comfi Bak®
backing

electrostatic propensity
 <2.0kv
fire rating ISO 9239 1
 6.5 kw/m² critical radiant flux (Thermo Bak™)
 9.0 kw/m² critical radiant flux (Comfi Bak®)
recommended adhesive
 RLA Polymers GS300
installation method
 quarter turn, directional, ashlar, brick
Comfi Bak® option
 50m² minimum
shapes option
 50m² minimum
availability
 in stock

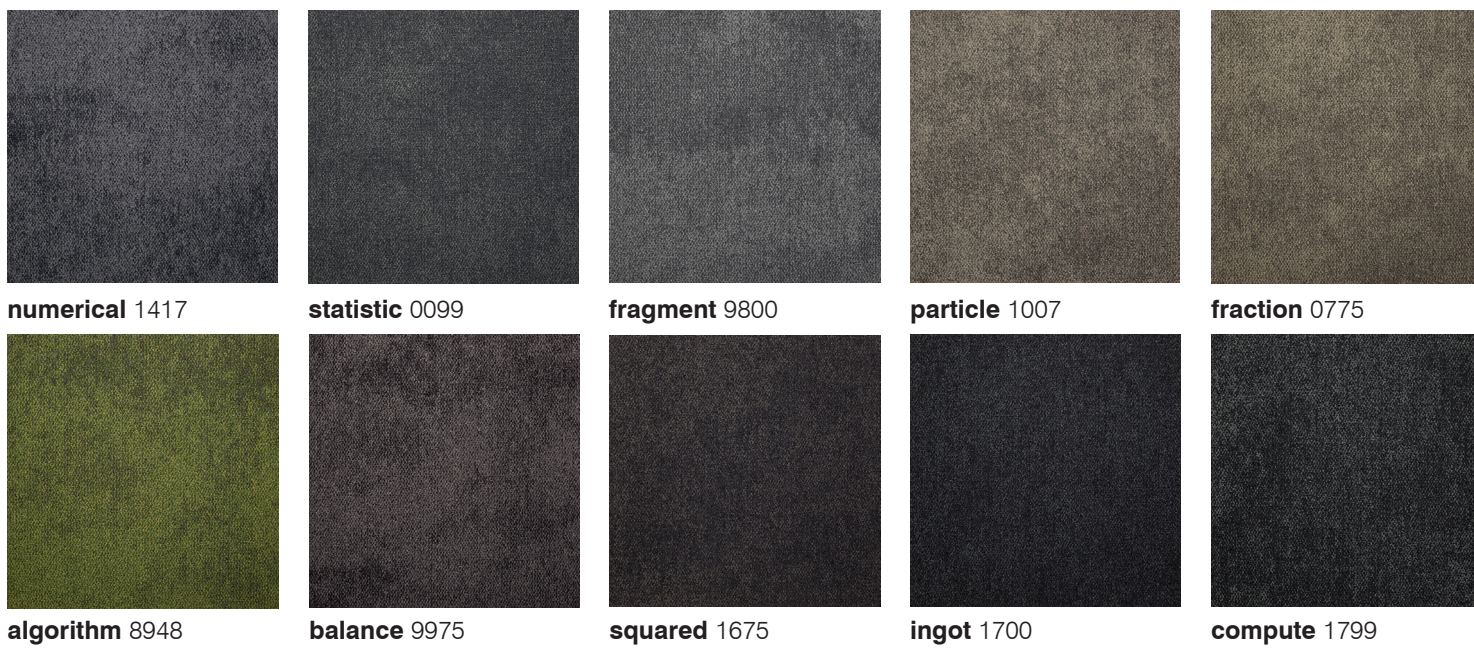



Signature[™]
floorconcepts

au 03 9401 0888
nz 0800 150 555
signaturefloors.com.au
signaturefloors.co.nz

Terms & Conditions: Specifications are subject to manufacturing tolerances and may be changed without prior notice. Dye lots may vary in colour from sample and between production lots. All product purchases are subject to Signature Floorcoverings Standard Terms & Conditions of Sale. Please refer to our Installation Guideline, Maintenance Manual and Warranty Document for further clarification. 06/2018©