

# PROJECT vinyls

*Signature*<sup>®</sup>  
floorconcepts



**PROJECT VINYL S  
BY SIGNATURE®**

PREMIUM QUALITY SHEET VINYL  
DESIGNED TO PERFORM IN  
THE MOST DEMANDING  
INSTALLATIONS



TAVEL T31

## AESTHETICS

PROJECT VINYLs FAITHFULLY


REPLICATE THE BEAUTY OF

NATURAL TIMBERS & STONE

COMBINING GREAT DESIGN

WITH EXCEPTIONAL

PERFORMANCE BENEFITS

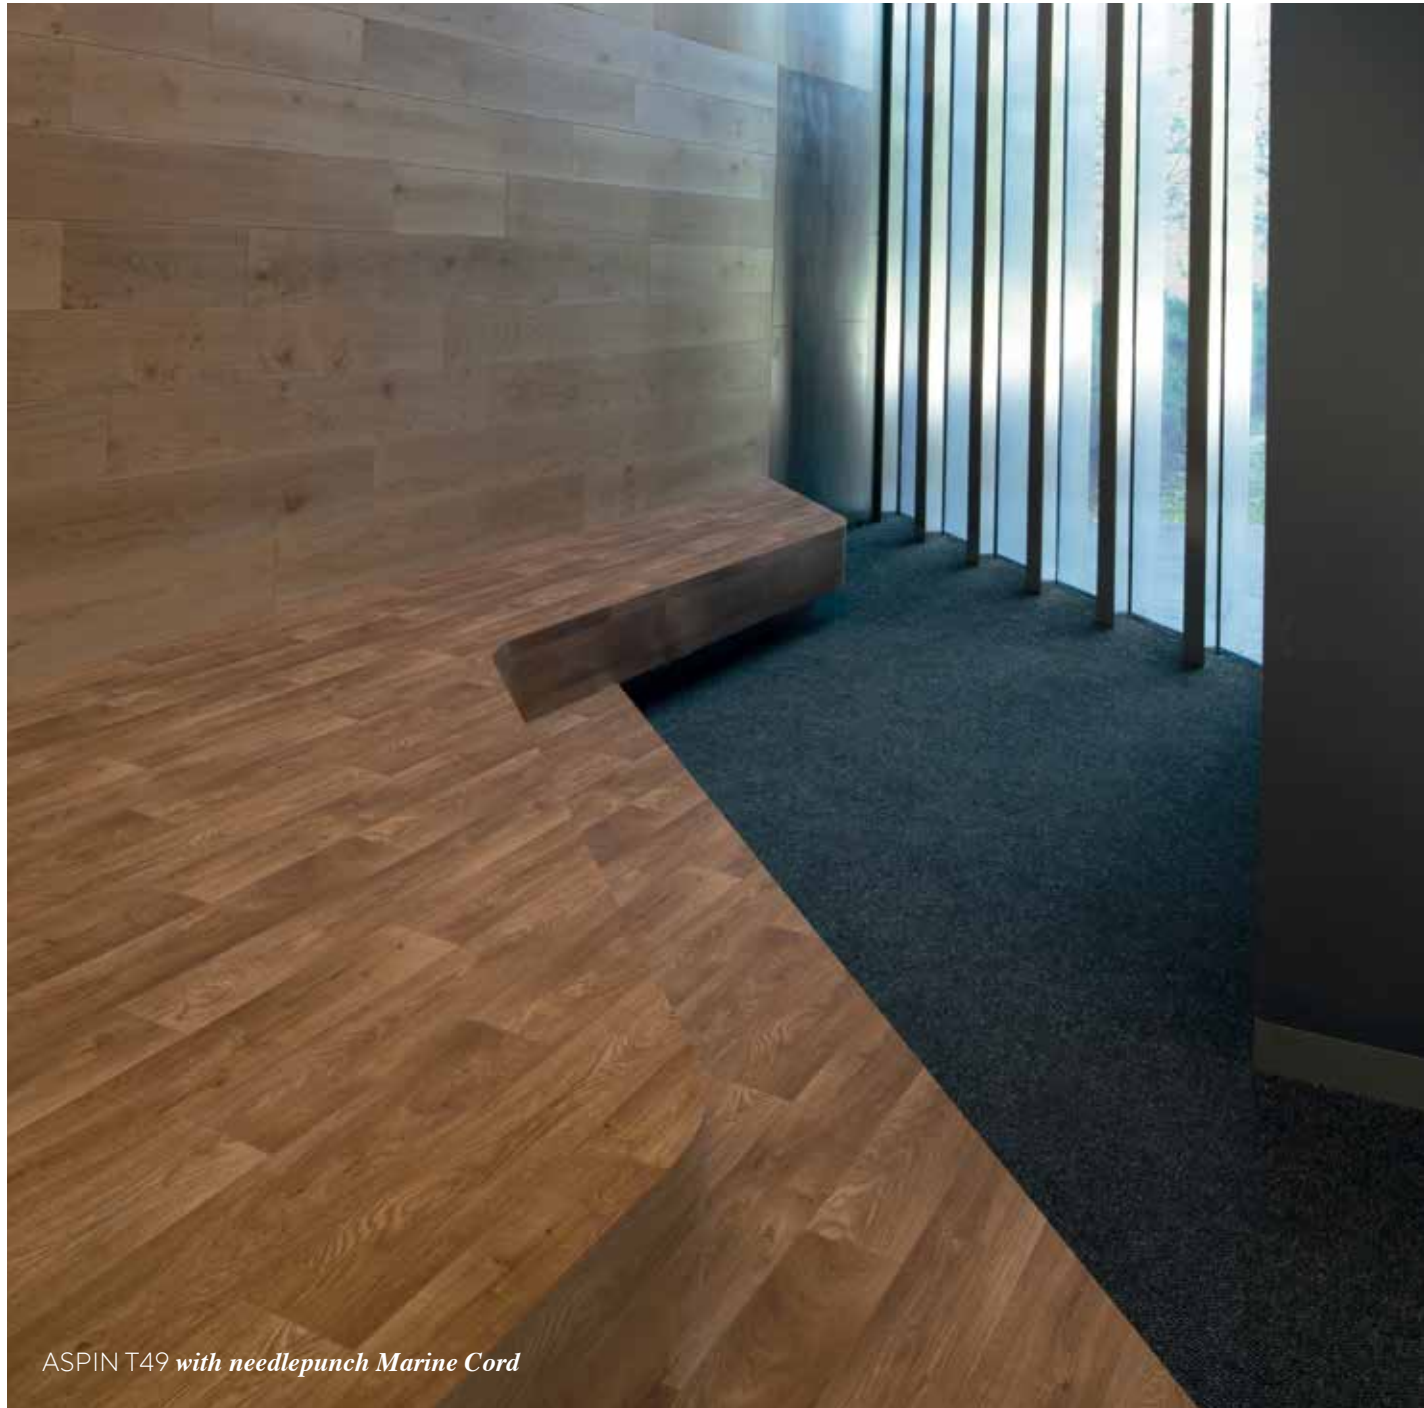

ASPIN T49 with *needlepunch Marine Cord*



ASPIN T49 (timber) & GALIBIER T92 with *needlepunch Marine Cord*






BOTTICELLI T96

## PERFORMANCE

FEATURING HYPERGUARD™  
WEAR LAYER TREATMENT,  
PROJECT VINYL IS  
IDEAL FOR HIGH TRAFFIC  
INSTALLATIONS



Signature<sup>®</sup>  
floorconcepts

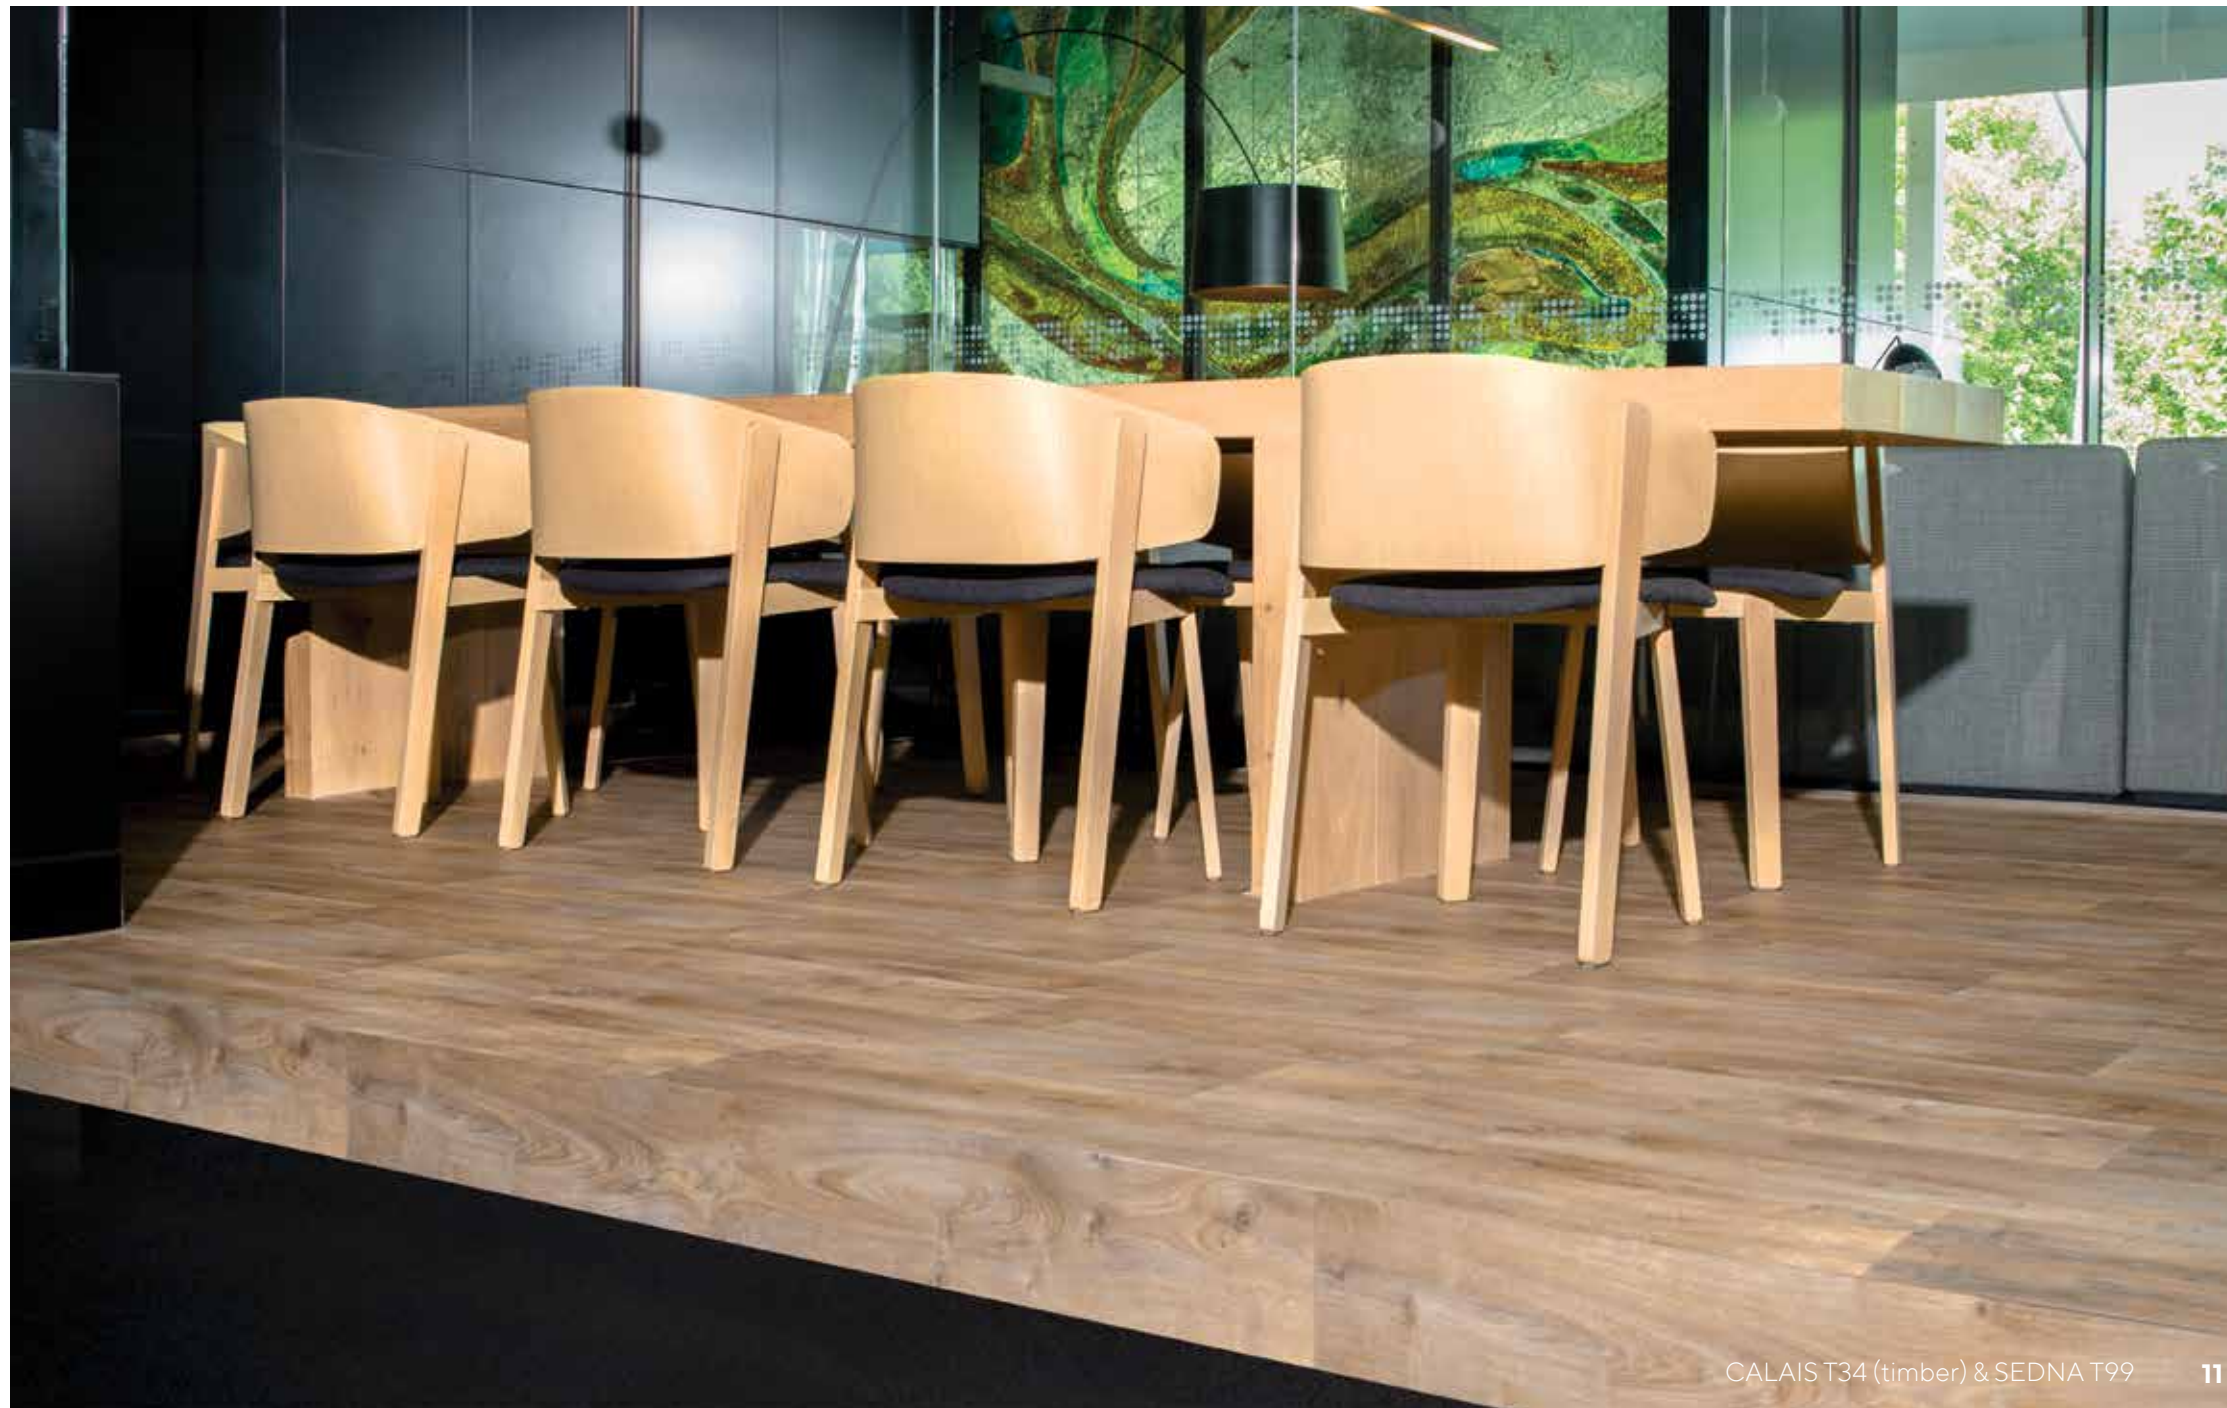

CALAIS T34 (timber) & SEDNA T99

**SECTOR FRIENDLY**

SUITABLE FOR EDUCATIONAL,  
HOSPITALITY, TRANSPORTATION  
& RETAIL ENVIRONMENTS  
- GUARANTEED COMMERCIALY  
FOR 15 YEARS





SEDNA T92

## SLIP RESISTANCE

IDEAL FOR PUBLIC AREAS

PROJECT VINYL'S RATE - R10/P2

FOR EXCELLENT GRIP

PERFORMANCE

PROJECT VINYL'S BY SIGNATURE®





TORONTO T99





CALAI34

## EUROPEAN MADE

THE PREMIUM QUALITY OF PROJECT VINYLS ORIGINATES IN THEIR CONTROLLED MANUFACTURE IN STATE-OF-THE-ART FACILITIES IN EUROPE. 100% RECYCLABLE, PROJECT VINYLS ARE A SUSTAINABLE AND ETHICAL FLOORING CHOICE

PROJECT VINYL BY SIGNATURE®



OLYMPUS T91

PROJECT VINYL BY SIGNATURE®

## EASY MAINTENANCE

WITH SANITEC™ ANTI-MICROBIAL  
TREATMENT WITHIN THE  
PRODUCT, PUBLIC AREAS ARE  
EASILY CLEANED

- IDEAL FOR AREAS REQUIRING  
A HIGHER LEVEL OF HYGIENE





TAVEL T31



TAVEL T30



TAVEL T02



TAVEL T95



OLYMPUS T95



OLYMPUS T91



OLYMPUS T33



SANTIAGO T49



ASPIN T49



CALAIS T45



CALAIS T34



ELIAS T32



ELIAS T93



SEDNA T75




SEDNA T99




BOTTICELLI T96



TORONTO T99



GALIBIER T95



GALIBIER T92



SEDNA T94



SEDNA T92



SEDNA T32



SEDNA T06

# PROJECT VINYL

## SPECIFICATIONS

<b>product</b>	project vinyls
<b>total thickness</b>	2.00mm
<b>wear layer</b>	0.70mm
<b>wear layer treatment</b>	HyperGuard+™
<b>surface treatment</b>	Sanitec™
<b>roll width</b>	2m & 4m
<b>standard roll length</b>	25 l/m
<b>acoustic insulation</b>	Lw 7 dB
<b>fire rating ISO 9239.1</b>	7.5 kw/m <sup>2</sup> critical radiant flux
<b>scratch resistance</b>	class T
<b>slip resistance:</b>	
- oil-wet ramp	R10
- wet pendulum	P2

<b>electrostatic performance</b>	<2.0kV
<b>underfloor heating</b>	suitable
<b>cold welding</b>	suitable
<b>hot welding</b>	suitable
<b>warranty</b>	
	20 year residential
	15 year commercial
<b>sustainability availability</b>	100% recyclable
	in stock



<b>Warranty</b> 20 Years Residential	<b>Warranty</b> 15 Years Commercial	<b>Slip</b> Slip Resistant P2/R10	<b>Fire</b> Suitable All Areas	<b>Green</b> 100% Recyclable	<b>Scuff</b> Mark Protection	<b>Stain</b> Stain Resistant	<b>Moisture</b> Moisture Resistant	<b>Wear</b> PUR Layer Protection	<b>Hygiene</b> Anti-Microbial
---	--	--------------------------------------	-----------------------------------	---------------------------------	---------------------------------	---------------------------------	---------------------------------------	-------------------------------------	----------------------------------



innovation & inspiration



tel 03 9401 0888  
fax 03 9401 0866  
[signaturefloors.com.au](http://signaturefloors.com.au)

Limitations of the printing process  
may not represent the actual colour  
of the product. Please refer to  
samples for final colour selection.

**Terms & conditions:** Specifications are subject to manufacturing tolerances and may be changed without prior notice. Product may vary in colour from sample and between production lots. All product purchases are subject to Signature Floorcoverings Standard Terms & Conditions of Sale. Please refer to our Installation Guideline, Maintenance Manual and Warranty Document for further clarification. © Signature Floors 01/2019

**See detailed installation guidelines & warranty info online.**