
OSLO



opening the door to endless creative possibilities with smart design

innovation & inspiration

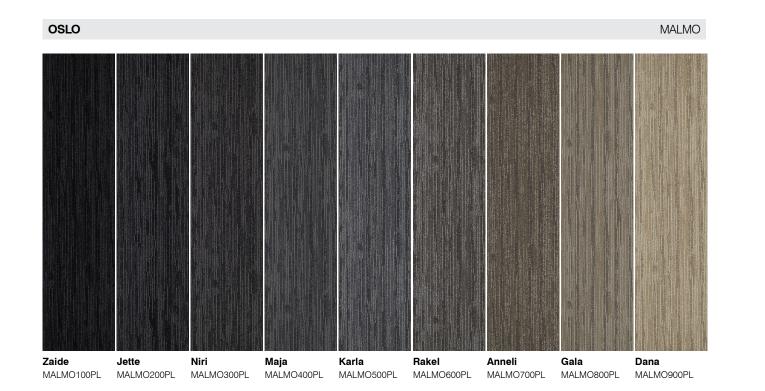

OSLO



OSI

SKANDI

Tale

Natti SKANDI700PL Winie

Flen SKANDI800PL SKANDI900PL

OSLO

product construction varn/fibre pile weight pile height gauge plank size total thickness carton size total weight dimensional stability backing electrostatic propensity fire rating ISO 9239.1 recommended adhesive installation method co-ordinates with

Comfi Bak® option* customise Shapes* traffic warranty fire GreenStar availability

malmo

high loop, low cut solution dyed nylon 850g/m² 4mm 1/10" 250mm x 1000mm 7.5mm 5m² 5.2kg/m² < 0.15% Thermo Bak™ <3.0kv >4.5kw/m² critical radiant flux RLA Polymers GS300 ashlar, herringbone all Signature planks

100m² min 100m² min extra heavy duty commercial 15 year limited suitable all areas GreenTag[®] Certified in stock

skandi

high loop, low cut solution dyed nylon 850g/m² 4mm 1/10" 250mm x 1000mm 7.5mm $5m^2$ 5.2kg/m² < 0.15% Thermo Bak™ <3.0kv >4.5kw/m² critical radiant flux **RLA Polymers GS300** ashlar, herringbone all Signature planks

100m² min 100m² min extra heavy duty commercial 15 year limited suitable all areas GreenTag[®] Certified in stock

Our manufacturing process ensures no two planks are the same. Please note that there may be batch variations from different dye lots. *Comfi Bak[®] - optional backing for enhanced comfort. 100m² minimum order applies. *Available in Shapes by Signature[®]. 100m² minimum order applies.







R floorconcepts

au 1800 150 554 nz 0800 150 555 signaturefloors.com.au signaturefloors.co.nz

Terms & Conditions: Specifications are subject to manufacturing tolerances and may be changed without prior notice. Dye lots may vary in colour from sample and between production lots. All product purchases are subject to Signature Floorcoverings Standard Terms & Conditions of Sale. Please refer to our Installation Guideline, Maintenance Manual and Warranty Document for further clarification.09/2024©