


ignature ® floorconcepts





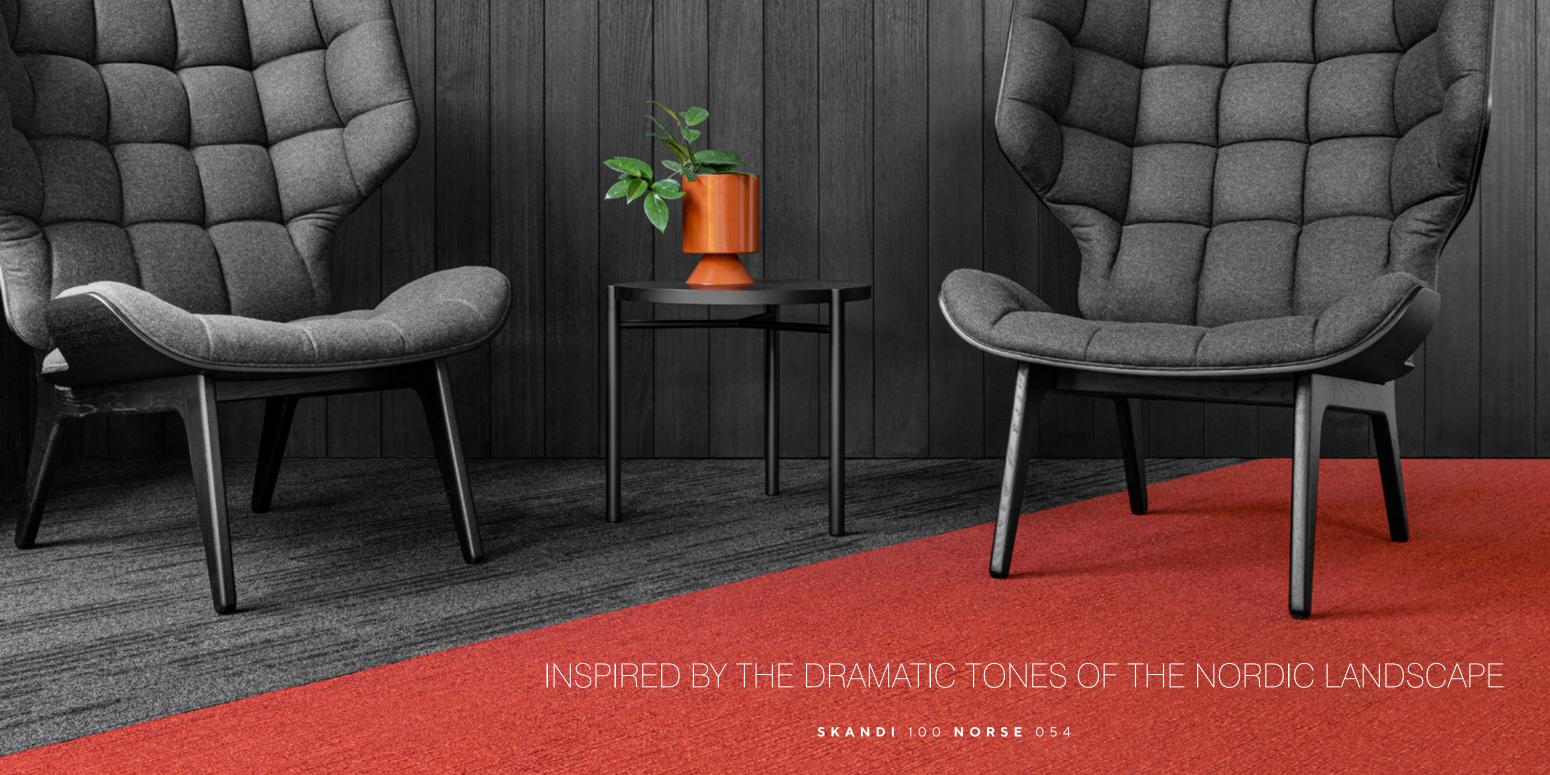

SPECIFICATIONS

product construction yarn/fibre pile weight pile height gauge plank size total thickness carton size total weight dimensional stability backing electrostatic propensity fire rating ISO 9239.1 recommended adhesive installation method availability Comfi Bak® option customise Shapes™ traffic stain/soil

norse

high loop, low cut solution dyed nylon 850g/m²

4mm 1/10"

> 250mm x 1000mm 7.5mm

5m² 5.2kg/m² < 0.15% Thermo Bak™ <3.0kv

>4.5kw/m² critical radiant flux RLA Polymers GS300 ashlar, herringbone in stock

warranty

Ultra Gard (thermo chemical treatment) sustainability GreenTag® Green Rate Level A EPDs and Declare labels

WELL eligible

50m² min

50m² min

15 year limited

suitable all areas

extra heavy duty commercial











Our manufacturing process ensures no two planks are the same. Please note that there may be batch variations from different dye lots.

Comfi Bak® - optional backing for enhanced comfort. 50m² minimum order applies. Available in Shapes by Signature® 50m² minimum order applies.

FRONT COVER: NORSE 067







NORSE 108, 105, 102, **MALMO** 700



au 1800 150 554 nz 0800 150 555 signaturefloors.com.au Limitations of the printing process may not represent the actual color of the product. Please refer to samples for final colour selection

Terms & conditions: Specifications are subject to manufacturing tolerances and may be changed without prior notice. Product may vary in colour from sample and between production lots. All product purchases are subject to Signature Floorcoverings Standard Terms & Conditions of Sale. Please refer to our Technical Information Manual, Maintenance Guide & Warranty Guide for further clarification. © Signature Floors 08/2023